
CBLX LINEAR PREMIUM SERIES 56 DIRECT VENT GAS FIREPLACE

Specifications


Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	
BLX56	28 000 (NG) 26,500 (P)	56	56 1/2	38 13/16	39 3/8	18 5/16	18 9/16	14 1/4 x 49

Dimensions

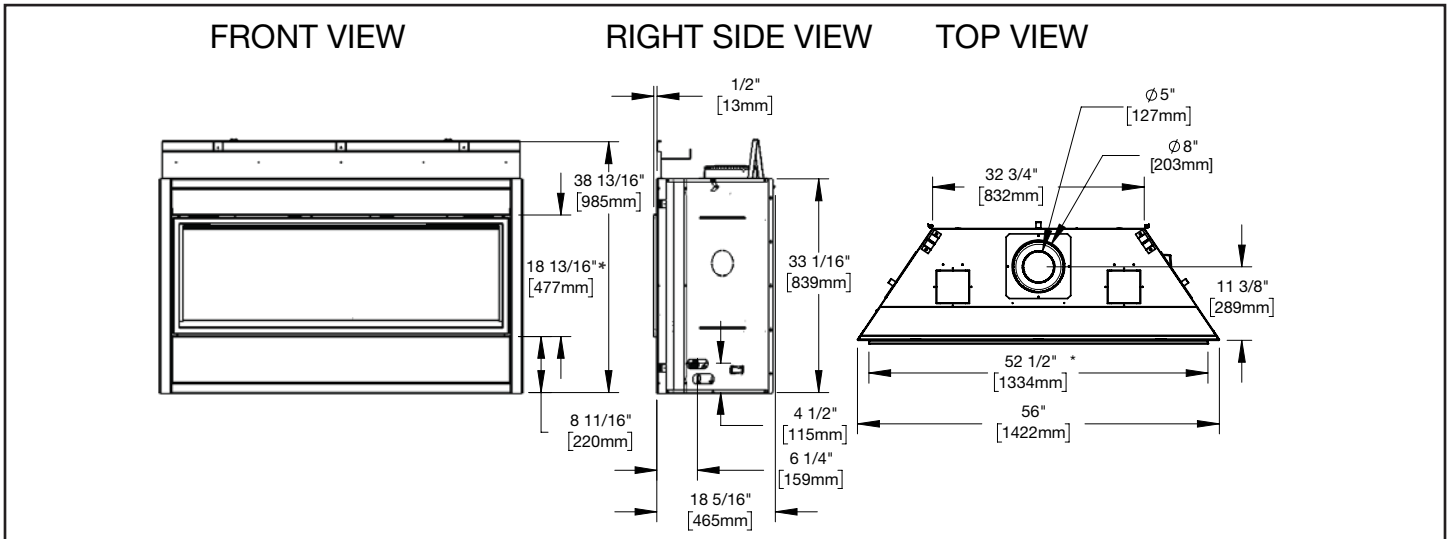

***Finishing flange depth (the finishing flange defines the perimeter of the fireplace opening; framing or finishing materials must NEVER encroach inside the finishing flange).**


Appliance Location

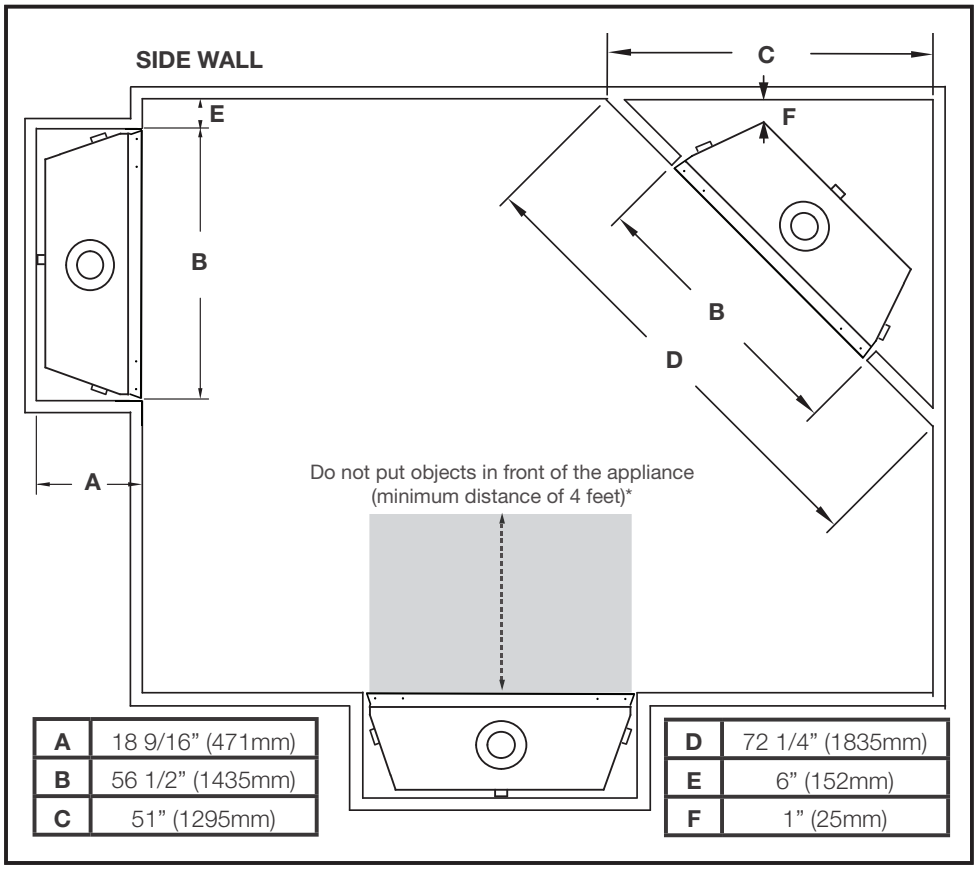

A	18 9/16" (471mm)
B	56 1/2" (1435mm)
C	51" (1295mm)

D	72 1/4" (1835mm)
E	6" (152mm)
F	1" (25mm)

Combustible Mantel Clearances

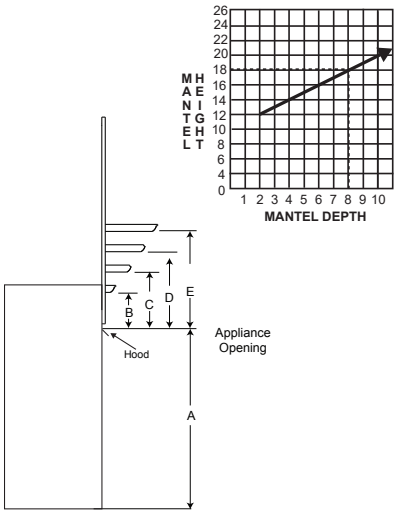


MANTEL DIMENSIONS		
Ref	Height	Depth
A	27 1/2" (699mm)	N/A
B	12" (305mm)	2" (51mm)
C	14" (356mm)	4" (102mm)
D	16" (406mm)	6" (152mm)
E	18" (457mm)	8" (203mm)

Mantel clearances may be reduced ONLY if the Universal Heat Management System is installed (see Installation Manual).

W415-10008433 / --0 / 11.14.25

Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.

Wall Penetration

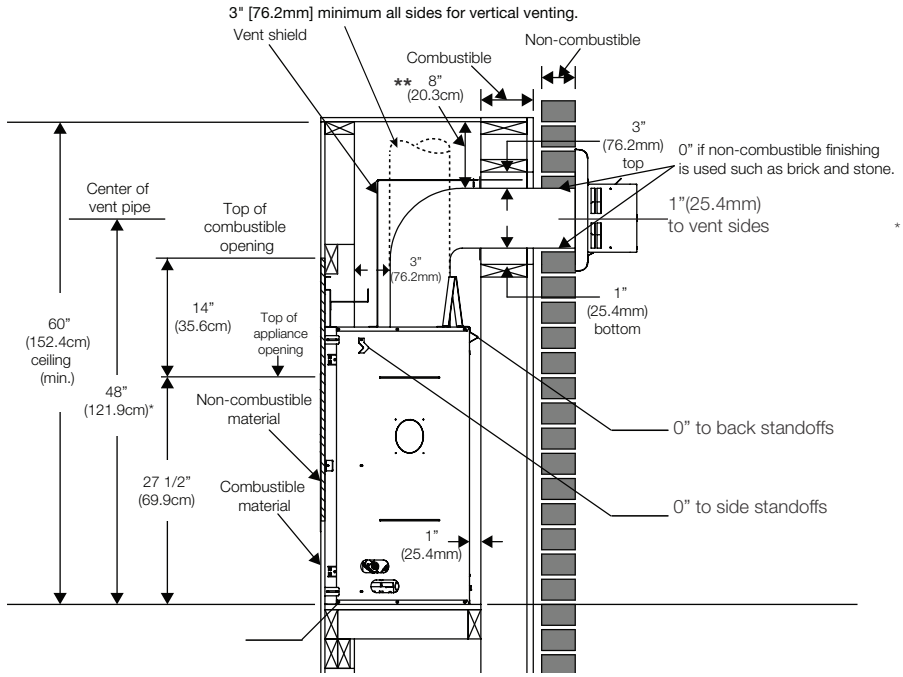

* See "venting requirements" and "venting installation" sections.

** Clearances within the enclosure may be higher, see "minimum framing dimensions" section.


note:


The vent shield is telescopic and must be adjusted to shield the full depth of the combustible wall penetration.

Framing

⚠ WARNING

- Do not build into this area - it must be left clear to provide adequate clearance for the vent in this 14" (35.6cm) wide area centered along the front of the appliance. The appliance should be in its final location before framing.

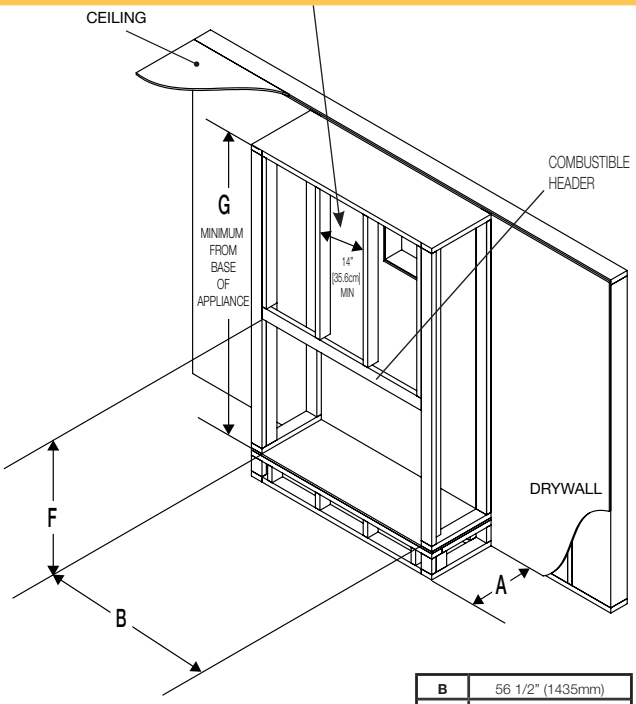

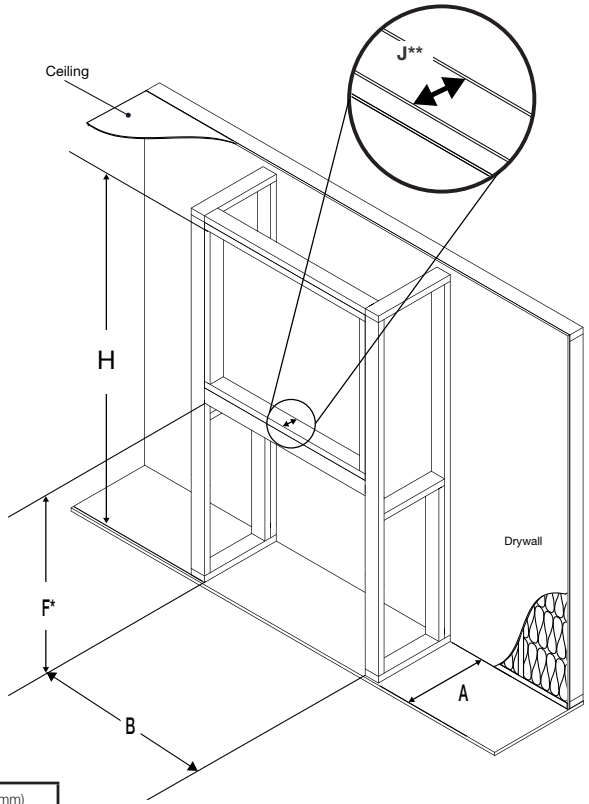

B	56 1/2" (1435mm)
F	39 3/8" (1000mm)
A	18 9/16" (471mm)
G	56" (1422mm)

H	84" (2135mm)
I	3 1/2" (89mm)

* Allow for finished floor and hearth thickness when setting these dimensions.

** 2" x 4" frame can be "backed" with 3/4" ply to support TV mounting hardware.

Wolf Steel Ltd., 24 Napoleon Rd., Barrie, ON L4M 0G8 Canada • 1(866)820-8686 • www.continentalfireplaces.com


FOYER À GAZ VENTILÉ DIRECTE SÉRIES CBLX LINÉAIRE PRIME 56

Spécifications


Modèle	BTU	Largeur		Hauteur		Profondeur		Dimensions de Vision
		Réel	Ossature	Réel	Ossature	Réel	Ossature	
BLX56	28 000 (NG) 26,500 (P)	56	56 1/2	38 13/16	39 3/8	18 5/16	18 9/16	14 1/4 x 49

Dimensions


VUE DE FACE

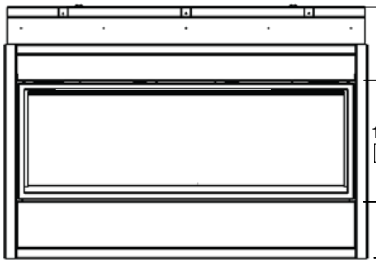

VUE DE CÔTÉ DROITE

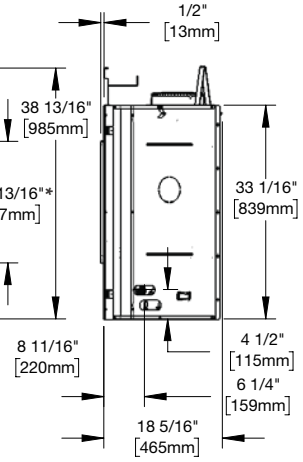


VUE DE DESSUS

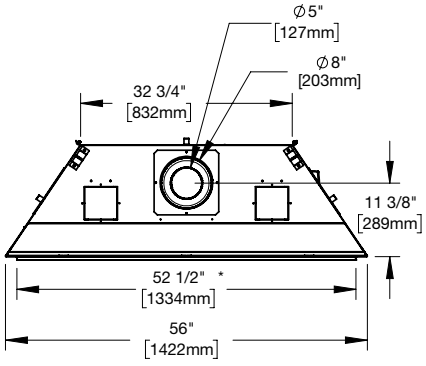

*La profondeur de la bride definition (la bride de finition définit le périmètre de l'ouverture de la cheminée; les matériaux de charpente ou de finition NE JAMAIS empiété à l'intérieur de la bride de finition).


Emplacement de l'appareil

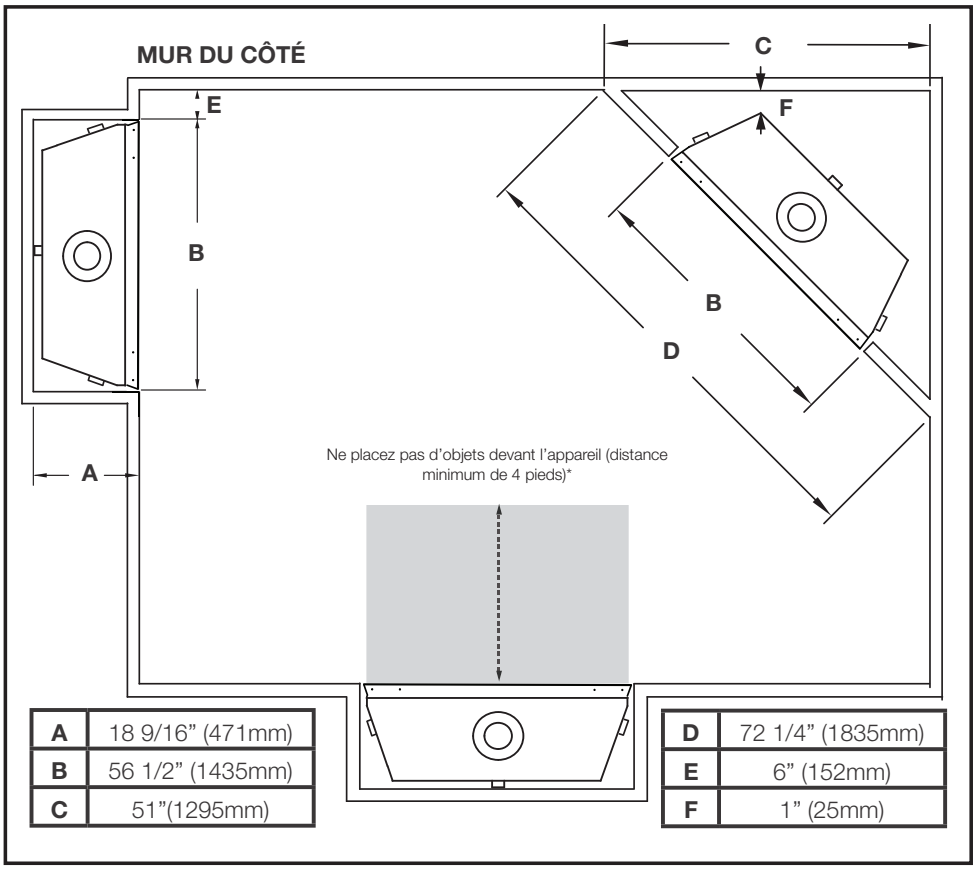

A	18 9/16" (471mm)
B	56 1/2" (1435mm)
C	51"(1295mm)

D	72 1/4" (1835mm)
E	6" (152mm)
F	1" (25mm)

Dégagements Combustibles de la Tablette

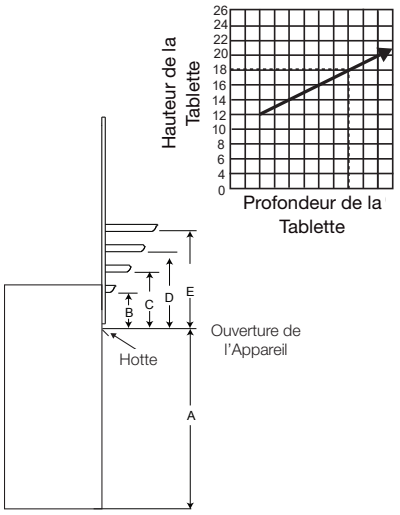


DIMENSIONS DE LA TABLETTE		
Réf	Hauteur	Profondeur
A	27 1/2" (699mm)	N/A
B	12" (305mm)	2" (51mm)
C	14" (356mm)	4" (102mm)
D	16" (406mm)	6" (152mm)
E	18" (457mm)	8" (203mm)

Les dégagements de la tablette peuvent être réduites SEULEMENT si la système de gestion de chaleur universelle est installée (voir la manuel d'installation).

W415-10008433 / --0 / 11.14.25

L'information du produit fourni n'est pas complet et est sujet de changer sans préavis. Consultez le manuel d'installation pour plus d'information d'installation actuel.

Pénétration du Mur

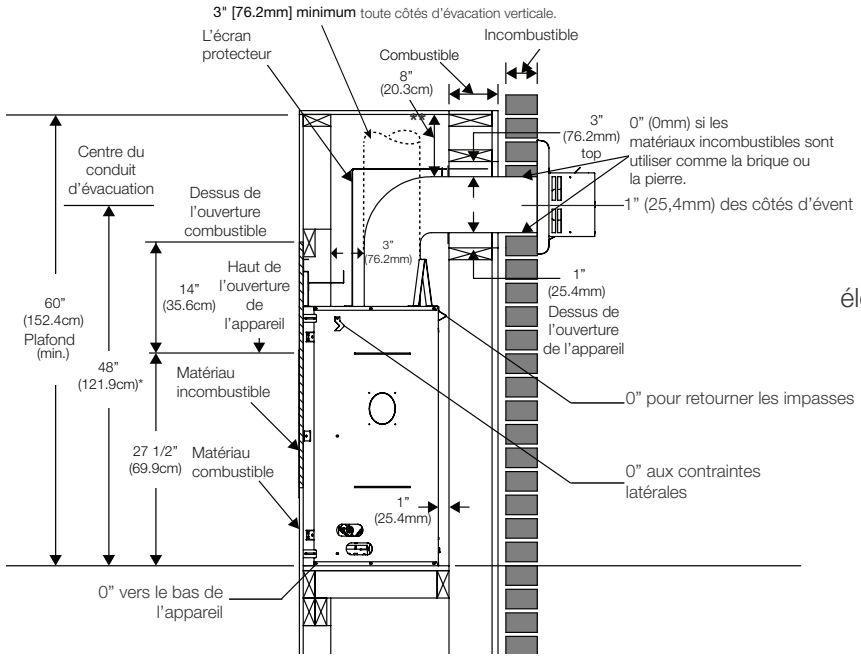

* Voir la section « évacuation ».

** Dégagements dedans l'enceinte peut être élevés, voir la section « dimensions minimaux de l'encadrement ».


note:


L'écran protecteur est téléscopique et doivent être ajusté à protection toute la profondeur de la pénétration de la paroi combustible.

Ossature

⚠ AVERTISSEMENT

- Ne construisez pas dans cet espace de 14" (35,6cm) de largeur, centré le long de l'avant de l'appareil. Cet espace doit resté libre afin d'offrir un dégagement adéquat pour l'évacuation. Aucun matériaux combustible n'est permis.

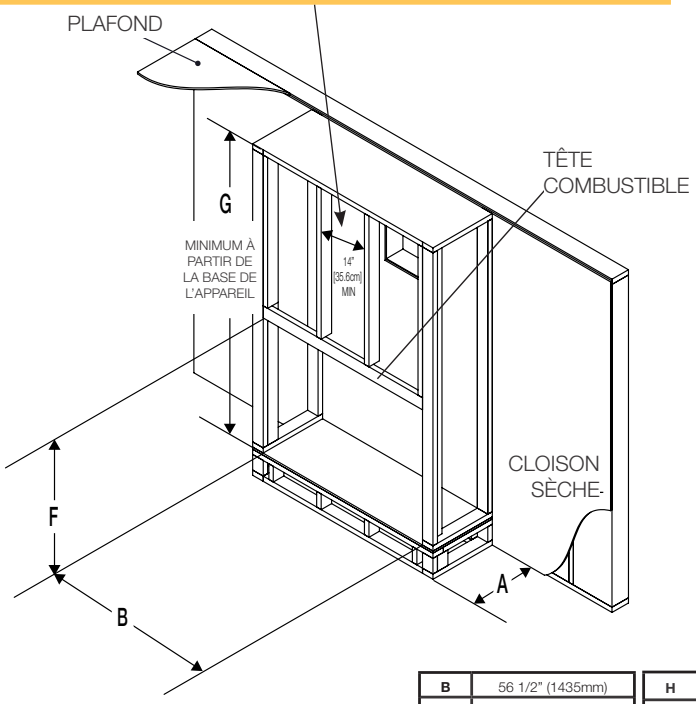

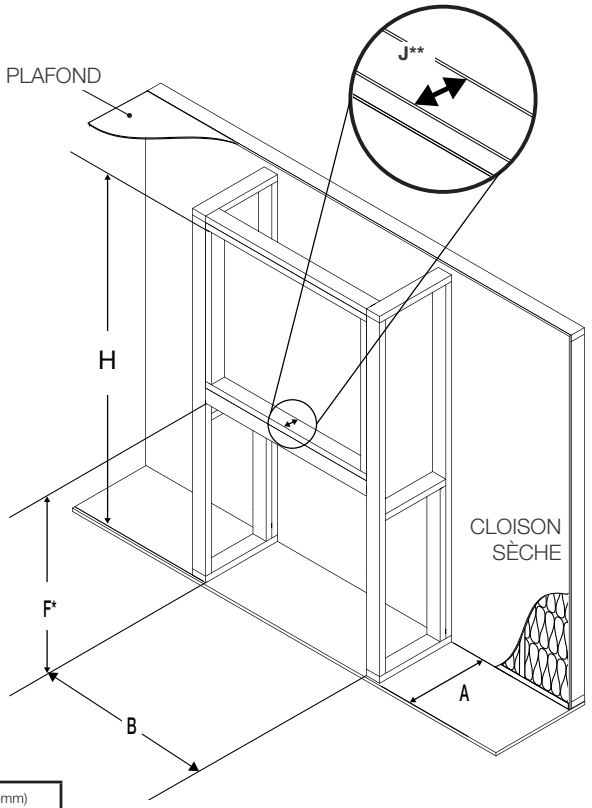

B	56 1/2" (1435mm)
F	39 3/8" (1000mm)
A	18 9/16" (471mm)
G	56" (1422mm)

H	84" (2135mm)
I	3 1/2" (89mm)

* Tenez compte de l'épaisseur du plancher et du foyer lorsque vous définissez ces dimensions.

** Le cadre de 2" x 4" peut être « renforcé » avec une pièce contraplaqué d'un épaisseur de 3/4" pour supporter le matériel de montage du téléviseur.

Wolf Steel Ltd., 24 Napoleon Rd., Barrie, ON L4M 0G8 Canada • 1(866)820-8686 • www.continentalfireplaces.com